


Parts List Figure 136010

ITEM#	PART NUMBER	QTY	DESCRIPTION
1	198010	2	Boom Mount
2	198015	1	Frame
3		4	Carriage bolt, 5/16-18 x 1"
4	198020	1	Front tank mount(For 25 gallon tank)
5		6	Bolt, 5/16-18 x 1"
6	198025	1	Top Hitch plate
7	198027	1	Bottom hitch plate
8		10	Nut, serrated, 5/16"
9	198030	1	Tongue, 15&25 gallon sprayer
10		4	Bolt, 5/16-18 x 1"
11		4	Washer, 5/16
12	198035	1	Axle, 55L and 95L Sprayer
13	135095	2	Tire Assy., 10"
14	135096	2	Push nut



Part Number
136010

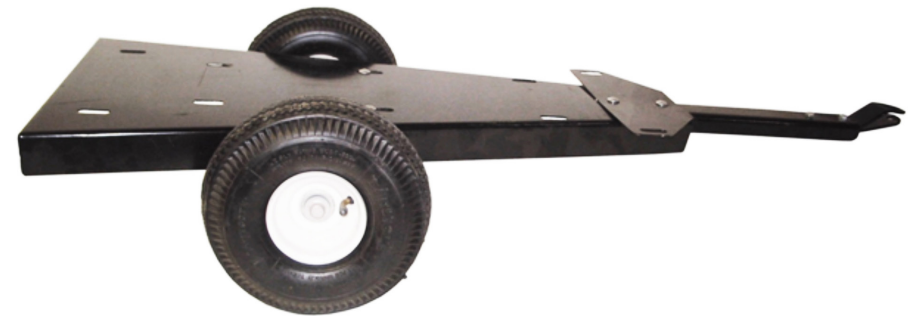

Outgang Road, Baston, PE6 9PT
www.enduramaxx.co.uk

Introduction

The purpose of this manual is to assist you in the assembly, operation and maintenance of your sprayer or accessories. Please read through this manual completely too fully understand how to operate and maintain your equipment. This product has been manufactured to provide years of dependable service; proper operation and maintenance will ensure its dependability. Keep your manual in a safe, convenient place for future reference. Always mention the model and part number in any correspondence.

ASSEMBLY

The Lawn sprayer trailer kit is designed to fit many applications. It has been specifically designed to attach easily to other Enduramaxx products. The following instructions are intended for the attachment of a Enduramaxx 55 or 95 Litre spot sprayer to the trailer kit. Please refer to the trailer figure in this manual for reference to the following assembly instructions.

Trailer Assembly

- 1 Locate trailer frame and place frame upside down on smooth surface.
- 2 Locate the trailer axle and position it over the two slotted holes in the center of the frame. Place two carriage bolts and nuts through the frame and axel. Tighten securely ensuring trailer axle is square to the frame. Ensure carriage bolts are inserted from the top of the frame through to the bottom; otherwise bolts will interfere with tank mounting.
- 3 Turn the frame over and place two wheels over the axle. Using a hammer, position the push nuts over the axle and tap lightly until push nut is seated firmly.
- 4 Attach the two boom mounting brackets to the back of the frame using four bolts and nuts. Tighten securely.
- 5 Determine if the trailer frame is going to be mounted to a 55 Litre tank or a 95 litre tank. The front tank mount is only required for 95 Litre tanks.
- 6 Place the front tank mount if required over the frame holes located at the front of the trailer. Using two Carriage bolts and nuts, bolt the tank mount, frame and tongue together. Tighten bolts securely.
- 7 Using two bolts and nuts, bolt the front hitch plates to the front of the tongue. Tighten bolts securely. The top hitch plate can be mounted on the top or bottom to allow for height adjustment to match garden tractor.

Tank mounting

- 1 Position sprayer tank over holes in trailer frame. Using the four bolts and washers, thread all four bolts by hand into the tank. Position tank squarely on frame and tighten bolts securely.

Boom Mounting

- 1 Following directions provided with boom manufacturer, mount boom to boom brackets on trailer.

WARRANTY PARTS SERVICE

Products sold shall be warranted from defects in workmanship and material when used within the service and scope for which they were designed for a period of one year from date of purchase. Contact your distributor/ dealer for replacements parts or warranty work. Please have your original sales receipt or other proof of purchase date when requesting any warranty work.

To ensure the correct parts are acquired always provide the model number of your sprayer/attachment and the part number and description obtained from the illustrated parts breakdown in this manual.

All products are sold in accordance with our terms and conditions of sales of goods dated 25.09.13. These terms and conditions can be found on our website. They are also available upon request.