



# Superhoze Hints & Tips

April 2018



# Instructions on Packaging

Superhoze instructions can be found on the rear of the packaging. Simply remove the wrap and find them on the reverse.





**Peel back the  
wrap to reveal the  
instructions**



# Instructions on the Website

An International version of the Superhoze instructions can be viewed and downloaded from the Hozelock website:

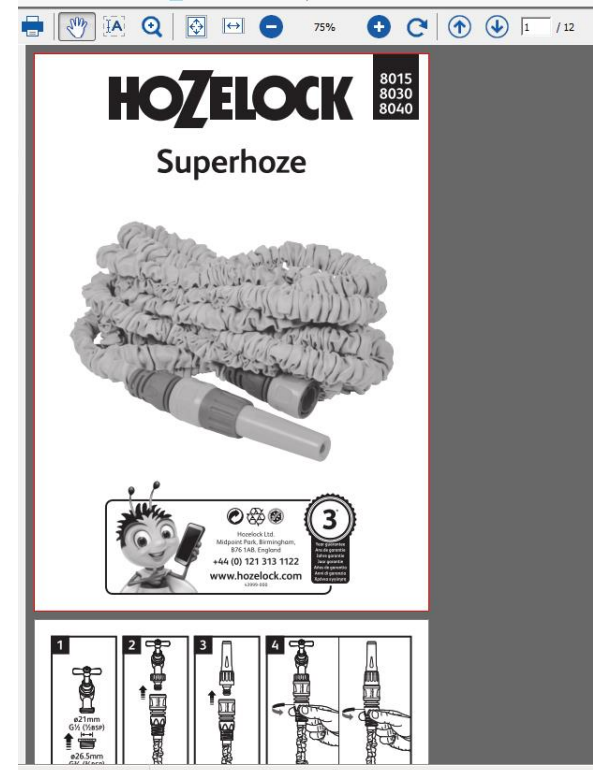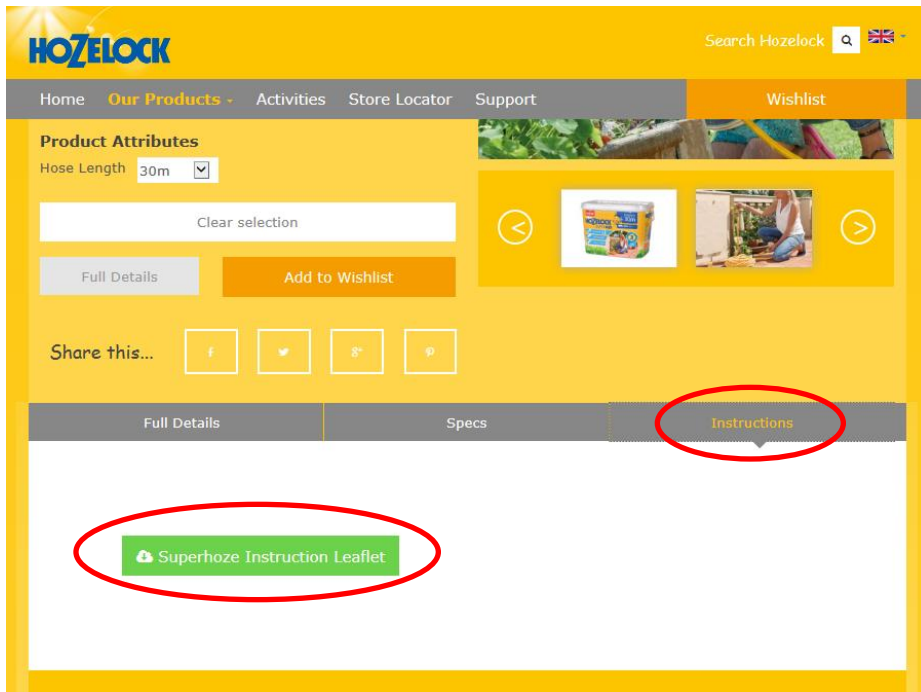

<http://www.hozelock.com/our-products/watering/garden-hose/superhoze/>



# Nozzle Operation

---

To ensure the correct 'open' and 'close' operation of the nozzle follow the steps below:

1. Press nozzle into fitting
2. Grip grey sleeve
3. Turn yellow nozzle in both directions to open and close water flow



# Expansion Controller

---

The expansion controller shown below is an integral part of the superhoze design. Please do not confuse this with being a blocked hose.



# Low Pressure/Hose Not Fully Expanded

If the water pressure is low (less than 2 bar) the hose may not fully expand to maximum length. During use the end of the hose appears to retract slightly as shown on the photographs. This will not affect the product's performance.








# Connector Assembly

If for any reason the hose connectors are removed from the Superhoze please ensure the correct re-assembly procedure is conducted as detailed below:

1. Hold the fabric with one hand and slide expansion retainer up to the adapter moulding. Ensure it is firmly pressed against the adapter.

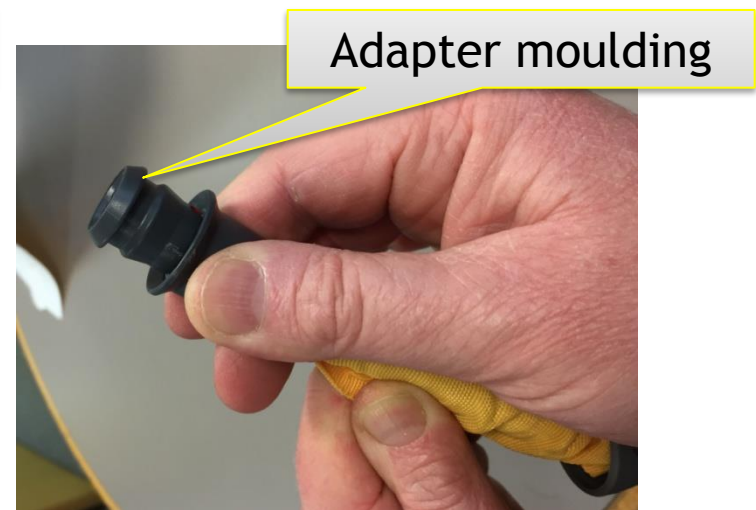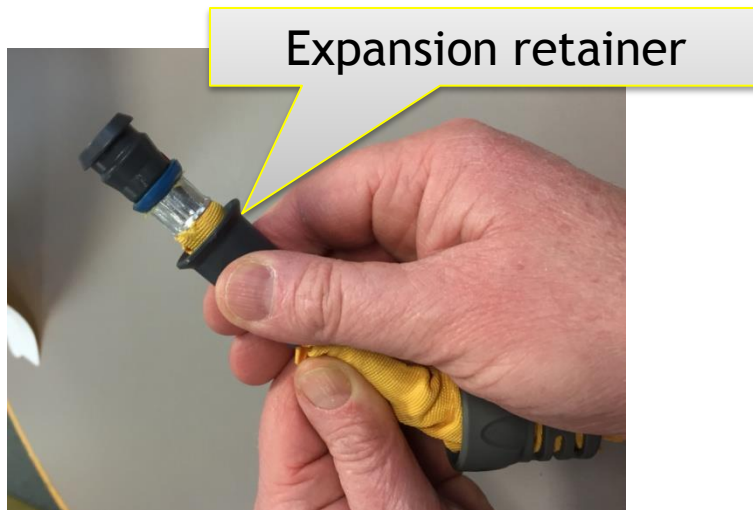

2. Insert the adapter moulding/expansion retainer assembly into the connector fitting ensuring all connector teeth are touching the face of the expansion retainer.

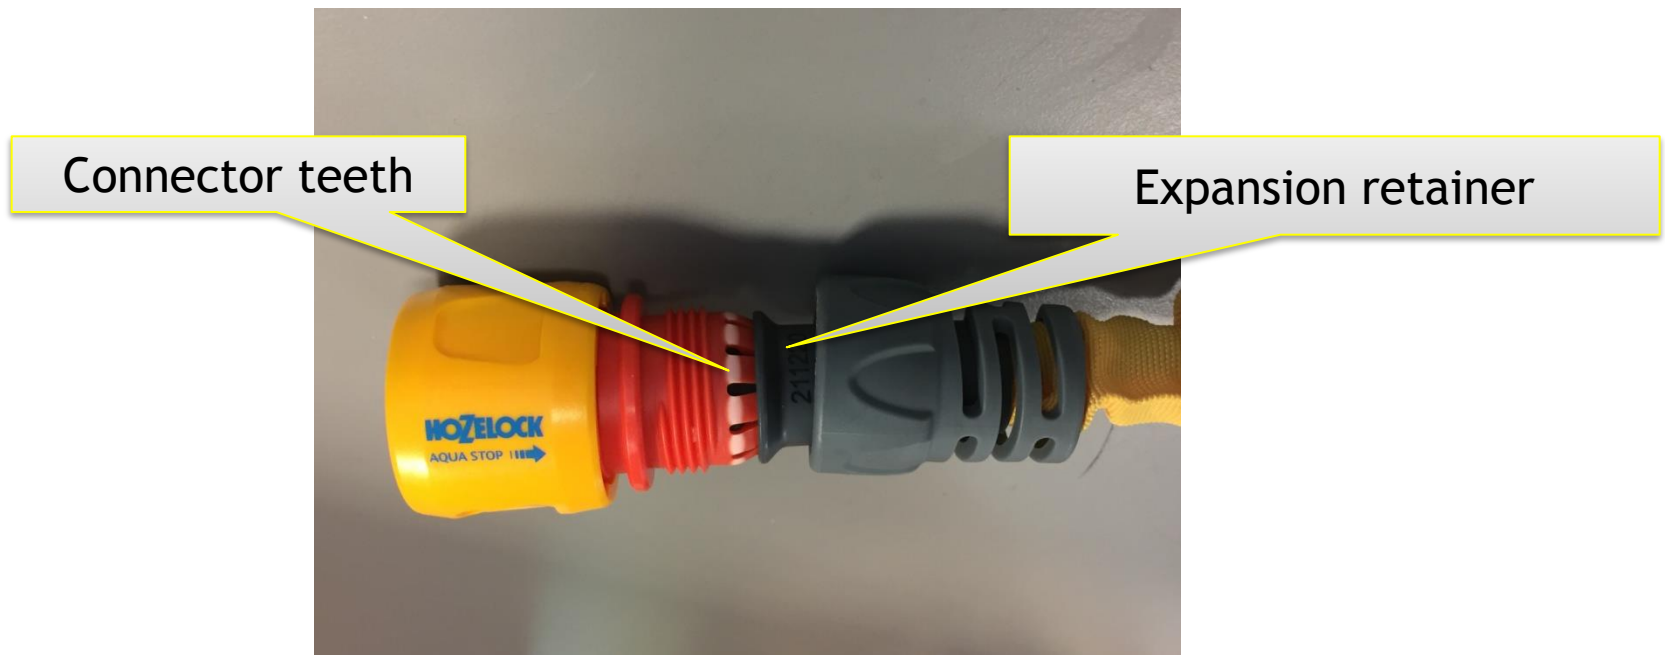



3. Screw nut onto the connector ensuring there's no cross threading and no connector teeth deformed/trapped, continue until it is fully tightened.




# Superhoze Spares

Replaceable  
9mm Aqua Stop Connector  
**Z21615**  
(93252-000)




- The Superhoze Aqua Stop connectors can be replaced and will be available as existing spare Z21615
- The 'tail' or nut of the Superhoze connector is permanently fixed, so the nut in the spare will not be needed

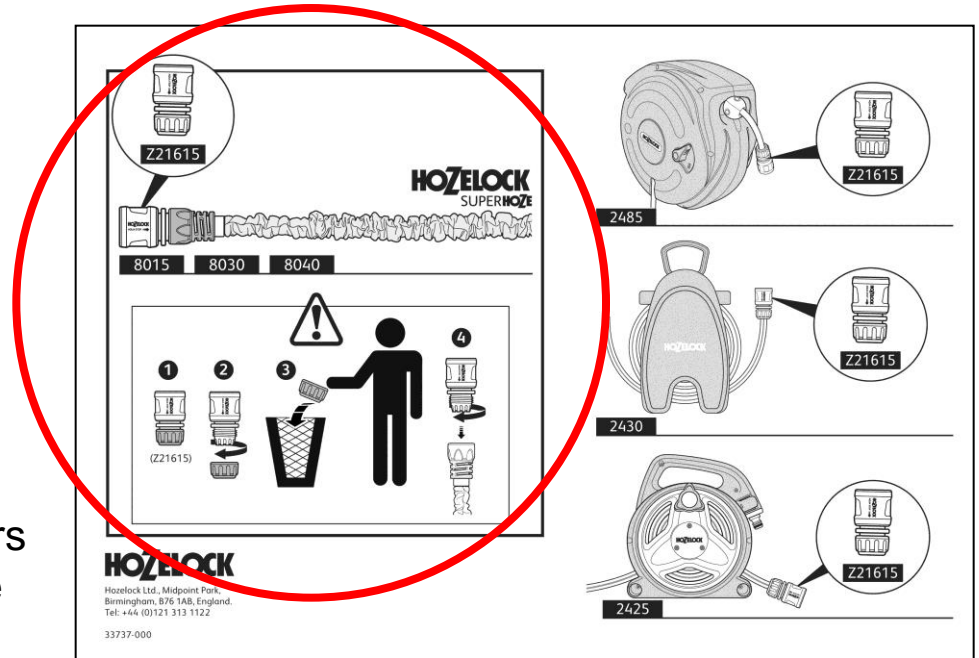

- The above instruction leaflet will be sent out with the replacement connector and illustrate that the nut should be discarded when used with Superhoze

# Use the Tub for Storage

Turn your Superhoze packaging into a storage device, by making a hole in the bottom of the tub to allow any residual water to escape. It is also suggested to leave the lid off to aid ventilation.

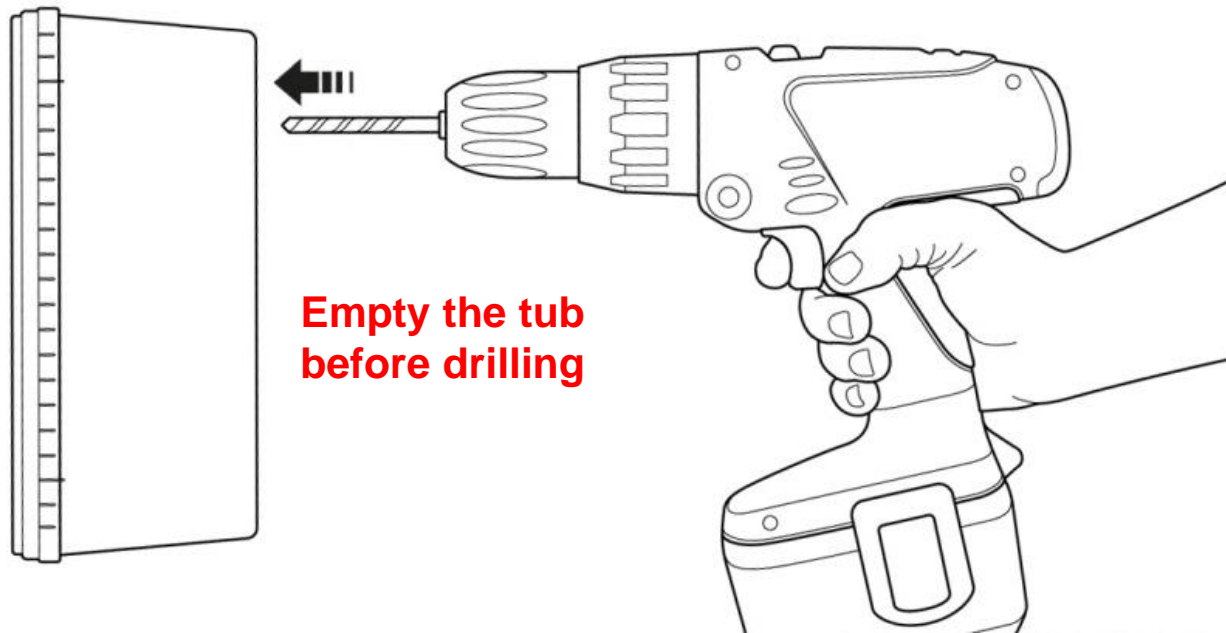



# Additional Information

---



Superhoze has a 2 year guarantee as standard, plus 1 additional year if the consumer registers online



All Hozelock Retail Hose are Phthalate Free to <0.01%



Superhoze is not recommended for use with Pressure Washers

# FAQs

---

**Q:** Can more than one Superhoze be joined together and what is the maximum lengths that can be joined? What are the implications e.g. loss of pressure?

**A:** Yes you can, but depending on tap water pressure, performance may be affected i.e. slight retraction when the hose end is open.

**Q:** Can you attach a Superhoze to the end of an Auto Reel?

**A:** Yes you can, but depending on tap water pressure, performance may be affected i.e. slight retraction when the hose end is open.

**Q:** Can you attach a Superhoze to Pico Power?

**A:** No, it is not recommended that the Superhoze is used with a Pressure Washer.